



### 20W Bulb Lamp LED Driver Module with the Active Power Factor Correction

AC Input Voltage Range	LED DC Output Voltage/Current	Output Power
90V <sub>AC</sub> /60Hz ~ 264(300 <sup>**</sup> )V <sub>AC</sub> /50Hz	54V/330mA	17.8W

\*\* - Change the CX1 form 104/275V to 104/340V to increase input range to 300V<sub>AC</sub>

#### Key Features

- Universal input from 90V<sub>AC</sub>/60Hz to 264(300<sup>\*\*</sup>)V<sub>AC</sub>/50Hz, LED DC 54V/330mA output
- One cycle control Power Factor Correction (PFC) and typical PF value > 0.97 @110V<sub>AC</sub> and PF>0.92@220V<sub>AC</sub>
- Fixed frequency buck converter and maximum efficiency : 88%
- LED output current variation :
  - ±2% for Full range (90-264V<sub>AC</sub>)
  - ±1% for Low Voltage(90-132V<sub>AC</sub>)
  - ±1% for High Voltage(180-264V<sub>AC</sub>)
- Dimension : 65mm×24mm×19mm
- Typical application : Bulb lamps

#### Introduction

This application note describes a constant current bulb lamp power module with one cycle control active power factor correction for full range input voltage from 90V<sub>AC</sub> ~ 264(300<sup>\*\*</sup>)V<sub>AC</sub> by adopting the SQ6211. Based on buck PFC topology, the SQ6211 is able to achieve high power factor value for bulb lighting application. This application provides multiple advanced fault protections to enhance the systems safety, including natural Open Loop Protection (OLP), Short Circuit Protection (SCP), V<sub>DD</sub> under-voltage lockout and thermal shut down. All protections have auto-restart mechanisms. Schematics, PCB Gerber, BOM, as well as typical performance are covered in details by this application note. A complete application circuit is depicted in Figure 5, which can work on universal input voltage range from 90V<sub>AC</sub> ~ 264(300<sup>\*\*</sup>)V<sub>AC</sub>.

#### BOM

BOM is shown in Table 3.

#### PCB Layout

The PCB dimension is 65mm × 24mm × 1.6mm and Module dimension is 65mm × 24mm × 19mm in order to fit bulb lamp space.

#### Power Module Photo

Pictures of power module and key components are shown in Figure 6 and 7.

#### Specification

The Table 1 represents the specification that this design intends to achieve.

#### Performance

It is to drive output at 54V/330mA targeting to achieve high efficiency ( $\eta_{MAX}=88\%$ ), high power factor (typical PF > 0.92) and current accuracy for AC universal input voltage range 90V<sub>AC</sub>~264(300<sup>\*\*</sup>)V<sub>AC</sub>. Actual performance is shown on Table 2. Figure 1, 2, 3 and 4 depict power factor, output current, current variation and efficiency at AC input voltage range 90V<sub>AC</sub> ~ 264(300<sup>\*\*</sup>)V<sub>AC</sub> for this module.



Table 1. Related Specification

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
AC input voltage	V <sub>AC</sub>	90		264(300**)	V	
LED DC output voltage	V <sub>OUT</sub>		54		V	
LED output current	I <sub>OUT(SET)</sub>		330		mA	

Table 2. Actual Performance

AC Input	Input Power (W)	Output Current (I <sub>OUT</sub> , mA)	Output Voltage (V <sub>OUT</sub> , V)	Current Variation (%) <sup>(Note)</sup>	Efficiency (η, %)	PF
90V <sub>AC</sub> /60Hz	20.17	326	54	-1.2	87.3	0.969
100V <sub>AC</sub> /60Hz	20.10	326	54	-1.2	87.6	0.973
<b>110V<sub>AC</sub>/60Hz</b>	<b>20.05</b>	<b>327</b>	<b>54</b>	<b>-0.9</b>	<b>88.1</b>	<b>0.972</b>
120V <sub>AC</sub> /60Hz	20.00	327	54	-0.9	88.3	0.968
132V <sub>AC</sub> /60Hz	19.97	328	54	-0.6	88.7	0.962
180V <sub>AC</sub> /50Hz	20.01	330	54	0.0	89.1	0.940
200V <sub>AC</sub> /50Hz	19.97	330	54	0.0	89.2	0.934
<b>220V<sub>AC</sub>/50Hz</b>	<b>20.06</b>	<b>331</b>	<b>54</b>	<b>0.3</b>	<b>89.1</b>	<b>0.924</b>
240V <sub>AC</sub> /50Hz	20.09	330	54	0.0	88.7	0.920
264(300**)V <sub>A</sub> c/50Hz	20.20	332	54	0.6	88.8	0.908

Note :

Current Variation is defined as follows :

$$\% = \frac{I_{OUT} - I_{OUT(SET)}}{I_{OUT(SET)}} \times 100\%$$

where I<sub>OUT(SET)</sub> = 330mA



Figure 1. Power Factor for AC Input Voltage Range 90V<sub>AC</sub> ~ 264V<sub>AC</sub>

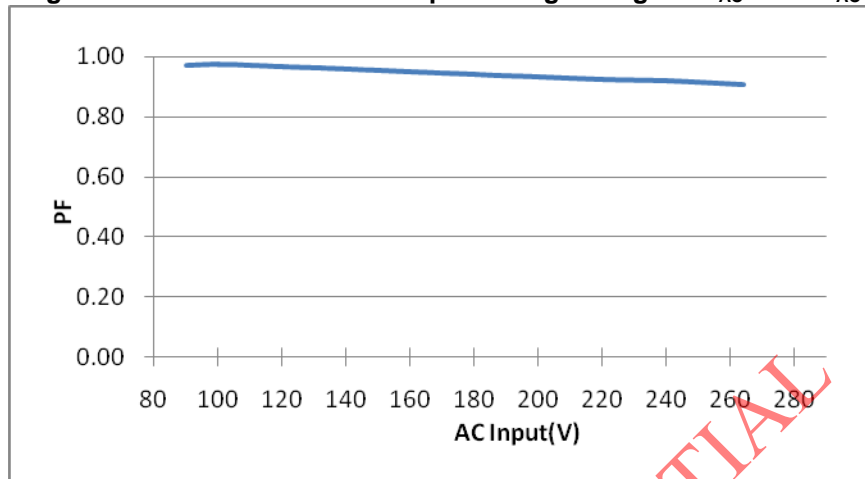


Figure 2. Output Current for AC Input Voltage Range 90V<sub>AC</sub> ~ 264V<sub>AC</sub>

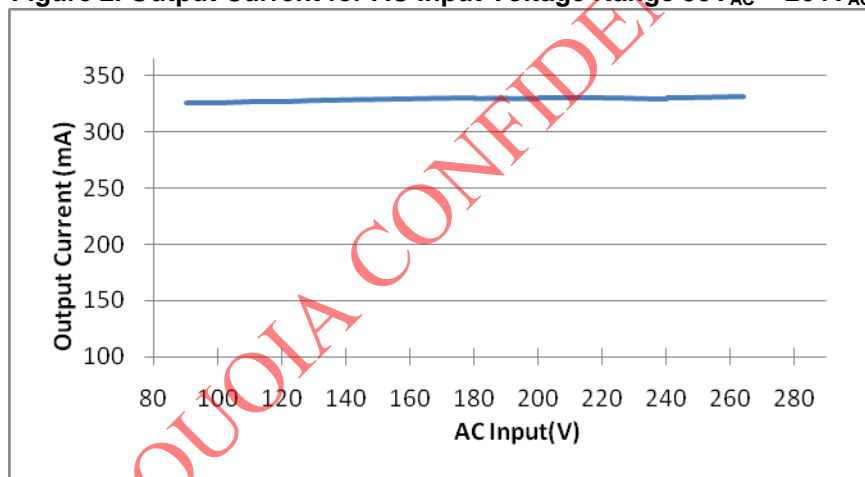
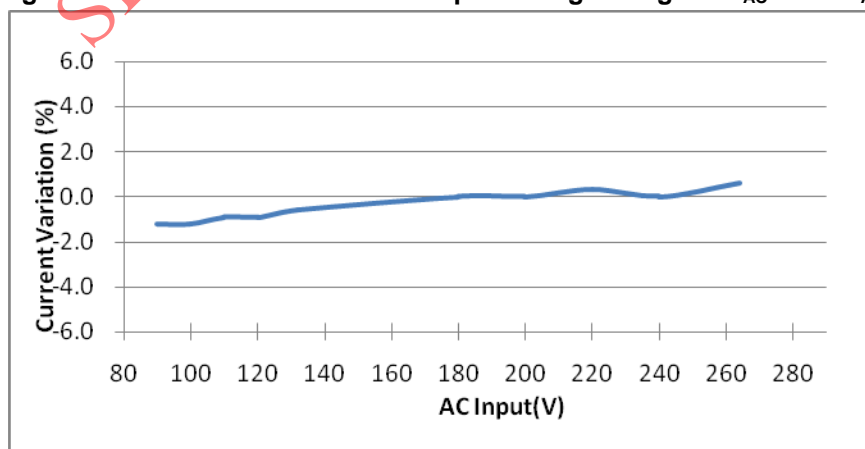
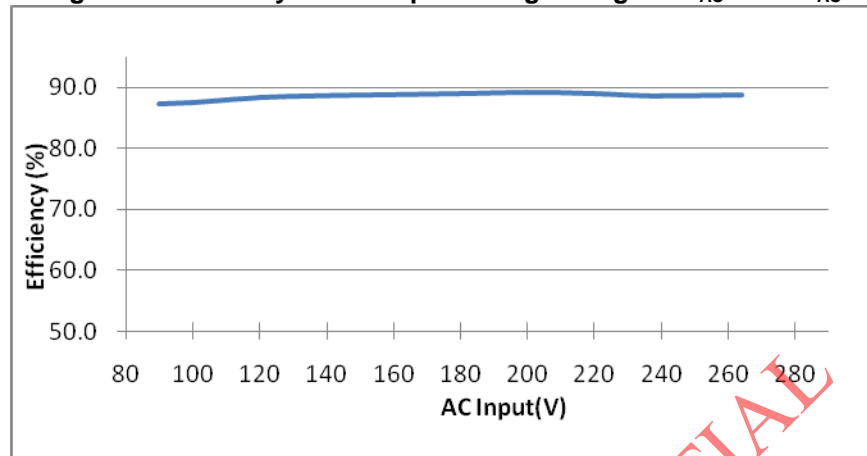


Figure 3. Current Variation for AC Input Voltage Range 90V<sub>AC</sub> ~ 264V<sub>AC</sub>



**Figure 4. Efficiency for AC Input Voltage Range 90V<sub>AC</sub> ~ 264V<sub>AC</sub>**



**Figure 5. A Complete Application Circuit by Adopting the SQ6211**


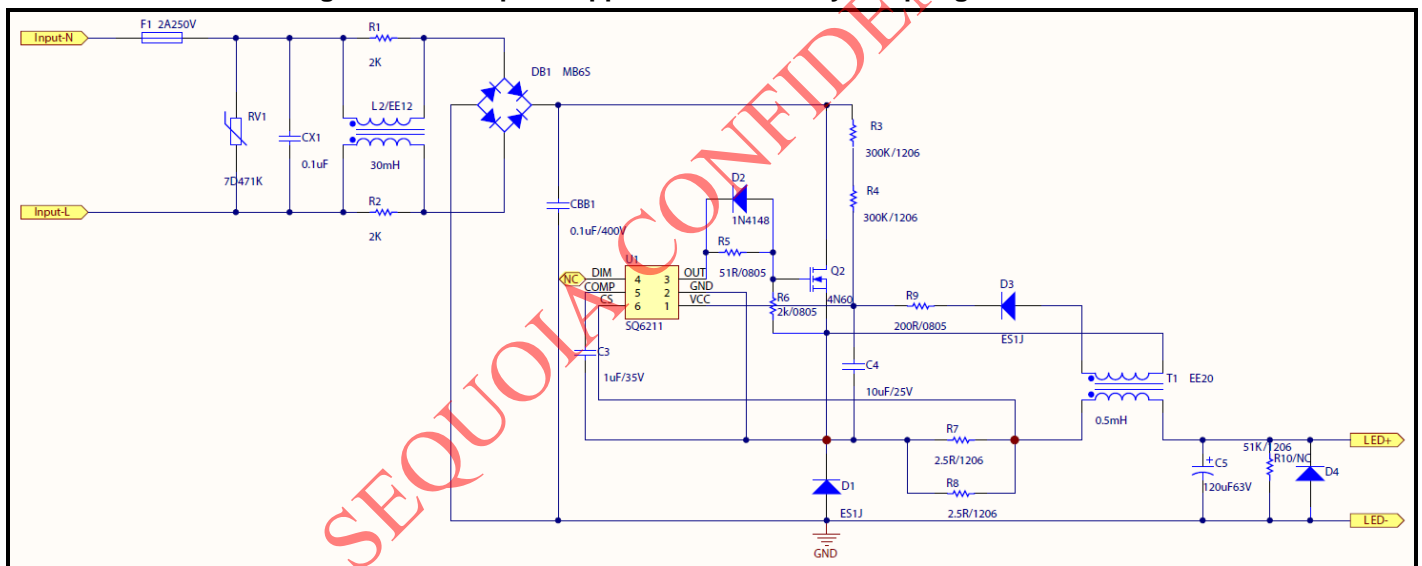




Table 3 : Bill of Material

Item	Symbol	Description	Category	Qty	Note
1	R1 R2	2K/0805/J	Resistor	2	
2	R3 R4	300k/1206/F	Resistor	2	
3	R5	51R/0805/J	Resistor	1	
4	R6	2K/0805/F	Resistor	1	
5	R7	1.2R/1206/J	Resistor	1	
6	R8	1.2R/1206/J	Resistor	1	
7	R9	200R/1206/J	Resistor	1	
8	R10	51K/0805/J	Resistor	1	
9	CB1	104/400V CBB PIN:10mm	Capacitor	1	
10	C4	10uF 0805 25V	Capacitor	1	
11	C3	1uF 1206 25V	Capacitor	1	
12	C5	63uF 100V 8*12mm 105°C 8000H	Capacitor	1	
11	DB1	DB105S 1A600V	BRIDGE	1	
12	CX1	104/275V CX2 PIN:10mm	Capacitor	1	104/340V (for 300Vac)
13	D2	1N4148 LL34 SOT-123	Diode	1	
14	D4	75V 1/2W LL34 Glass Package	Diode	1	Optional
15	D3、D1	ES1J 1A/600V SMA	Diode	2	
16	Q2	MOSFET 5A/650V TO-252	MOSFET	1	
17	L2	EE12 30mH Common Mode	Choke	1	
17	T1	EE20 0.5mH±6%	Choke	1	
18	RV1	7D 471 PIN: 5mm	MOV	1	
19	F1	2A/250V Slow 3.6*10mm	FUSE	1	
20	PCB	PCB : FR-4 L65mm*W24mm*T1.6mm	PCB	1	
21	U1	SQ6211 SOT-26	IC	1	

### Inductor Details

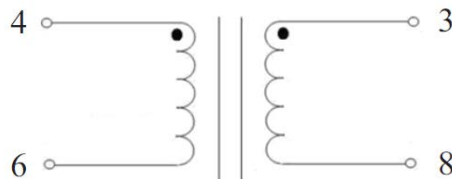

Winding	Wire	Pin	Turns	Tape
N1	2UEW, Ø0.30	4-6	120Ts	1T
N2	2UEW, Ø0.20	3-8	36Ts	2Ts

Figure 6. Picture of Top Side of the Power Module

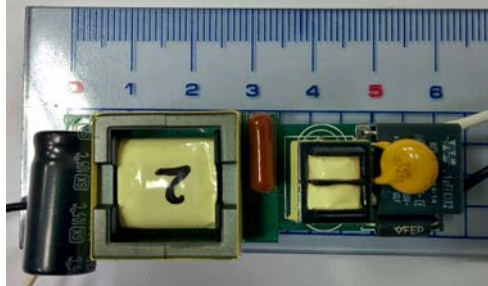


Figure 7. Picture of Bottom Side of the Power Module

